




Betriebsanleitung
 Operating Instructions
 Instructions de service
 Istruzioni d'uso
 Handleiding
 Instrucciones para el manejo
 Manual de instruções
 Naudojimosi instrukcija
 Kasutusjuhend
 Lietošanas instrukcija
 Driftsinstruks
 Driftsinstruktioner
 Käyttöohje
 Driftsvejledning
 Instrukcja obsługi





Kezelési útmutató
 Návod k obsluze
 Navodilo za uporabo
 Návod na obsluhu
 Upute za rad
 Manual de operatii
 Treoracha Oibriúcháin
 Οδηγίες χρήσης
 El Kitabi
 Инструкции за експлоатация
 Инструкция по эксплуатации
 取扱説明書
 사용설명서
 使用说明书


DT 4.10







2006/42/EG










 	 		 MAX. PRESSURE	 mbar
 AIR	   		 MAX. V	 m³/h L_{pA} = 60 dB(A) - 50Hz L_{pA} = 62 dB(A) - 60Hz K_{pA} = 3 dB(A)
DIN EN ISO 3744				

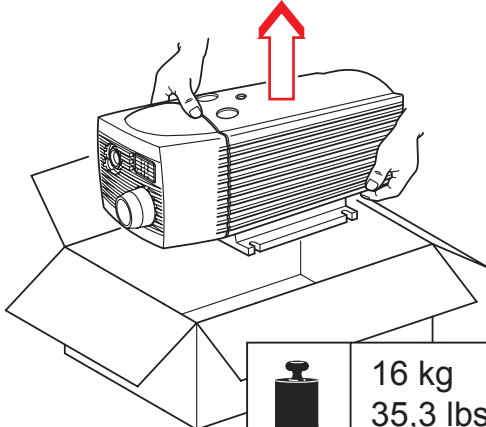								
								16 kg 35,3 lbs

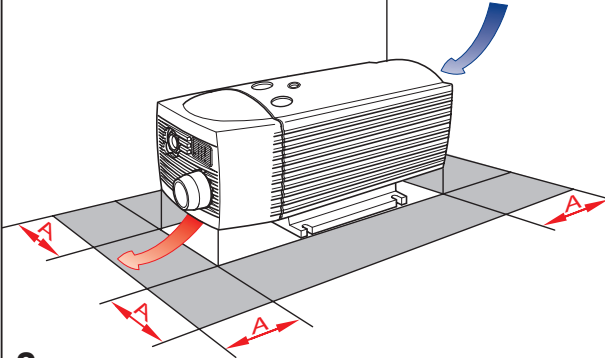A > 100mm A > 4"	 > 5°C/41°F < 45°C/113°F	 max. 90%	 max. 800m
			

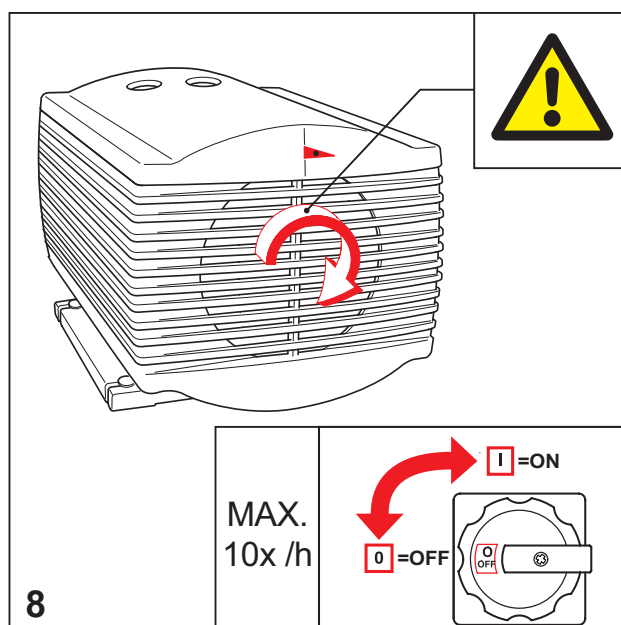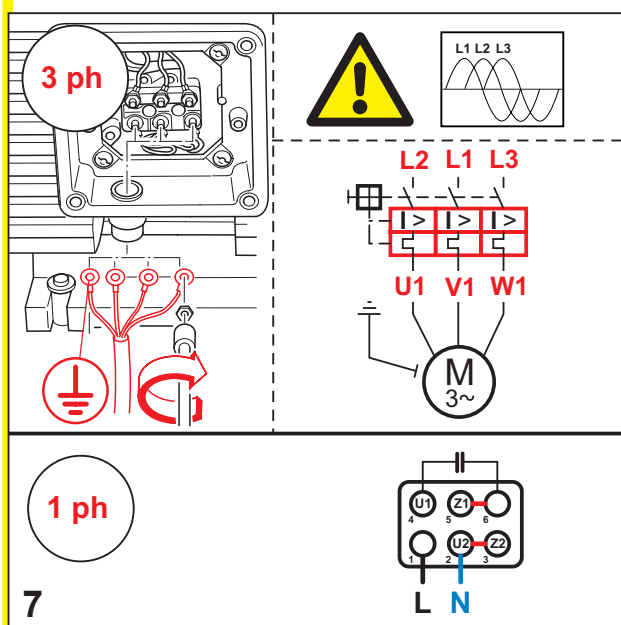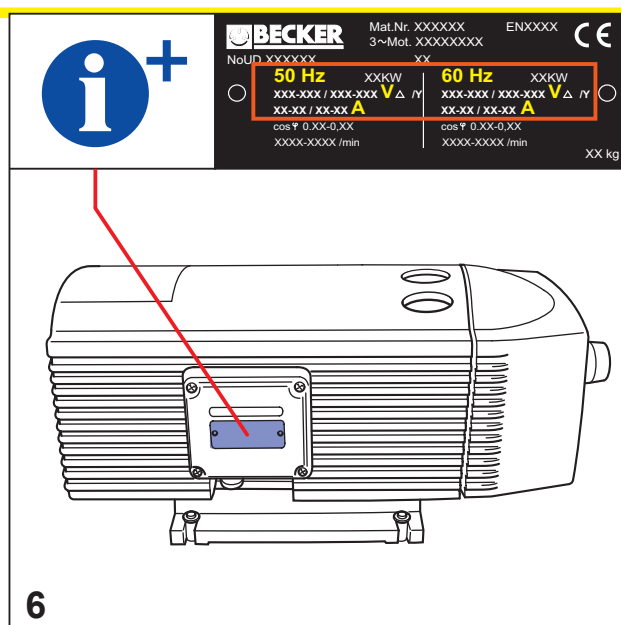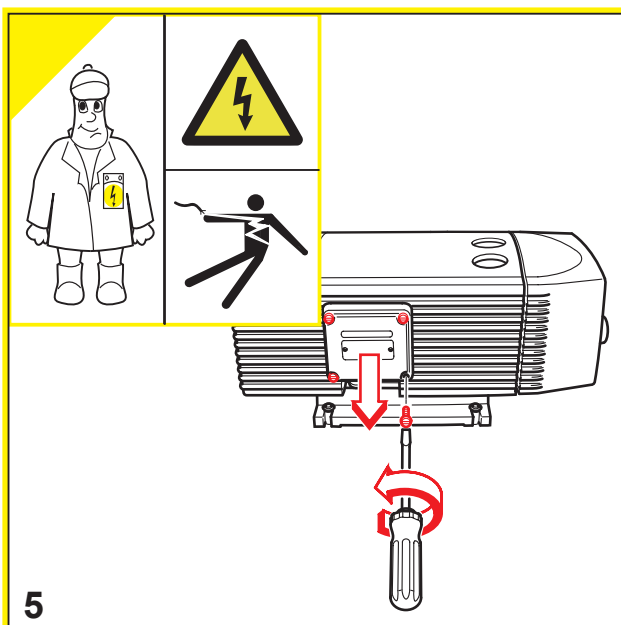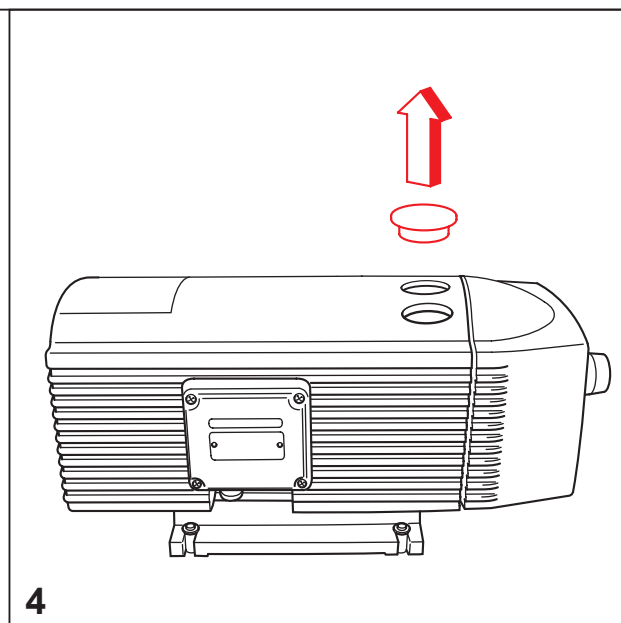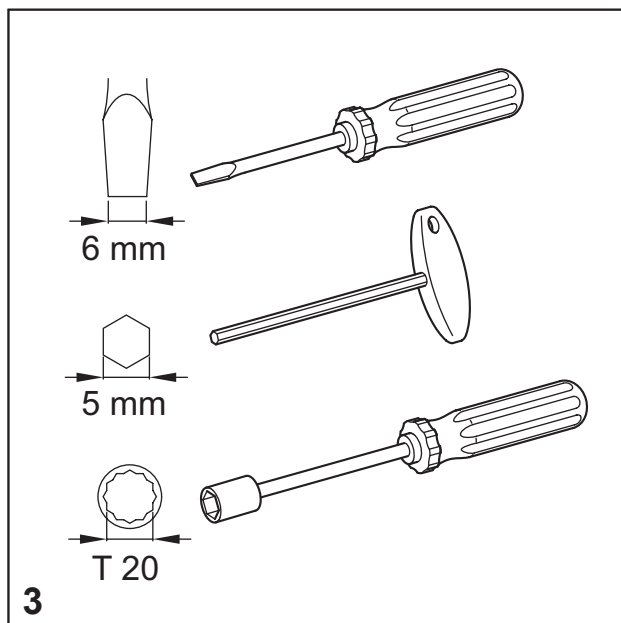

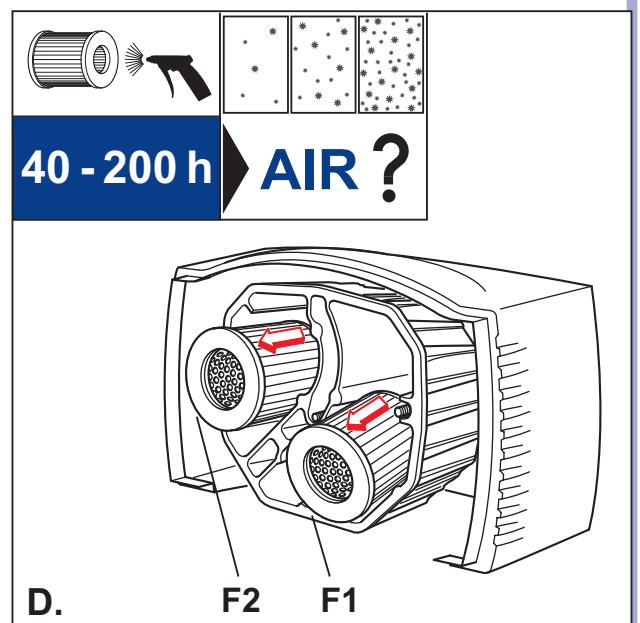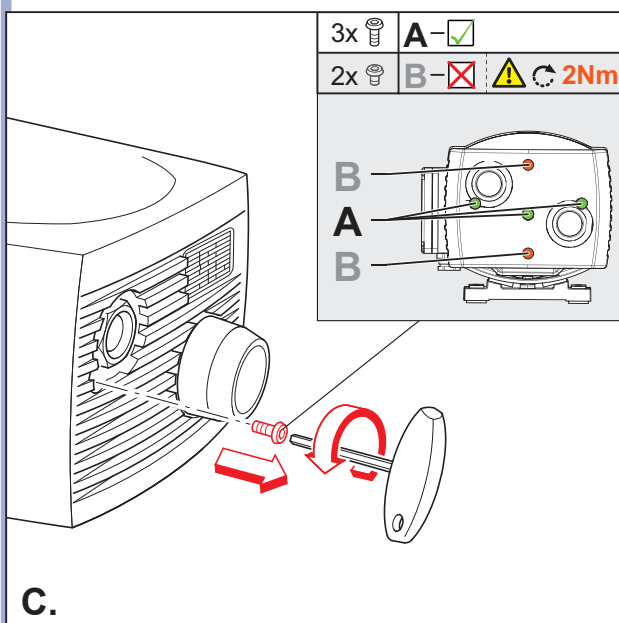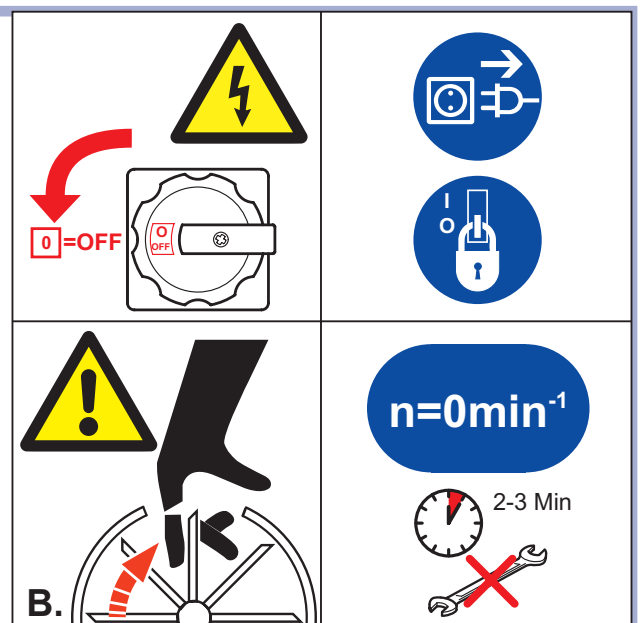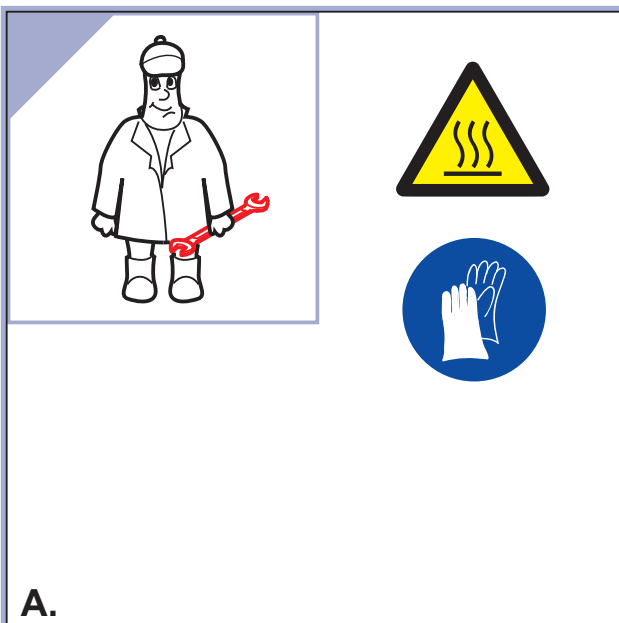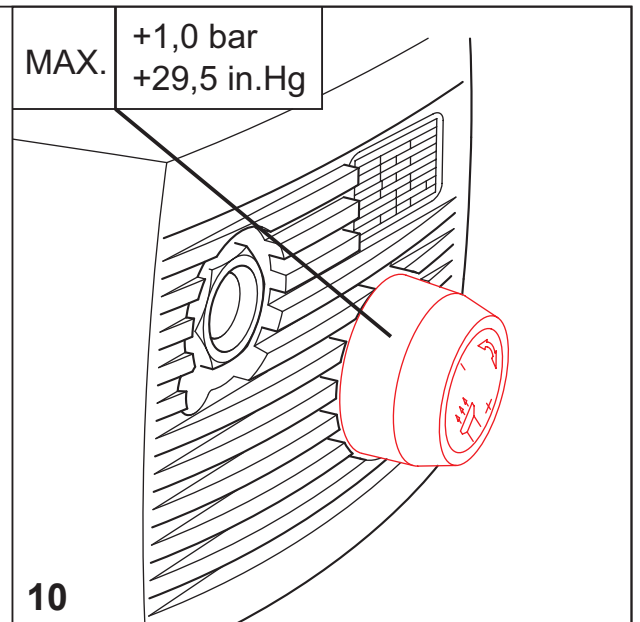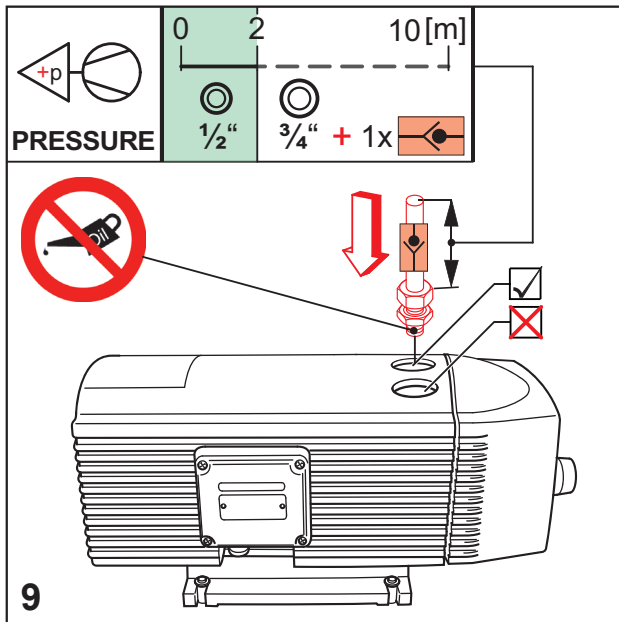




F1: D: 38 mm
H: 38 mm
No.: **90951800000**



EN149 - FFP3
42 CFR 84 - N100

F2: D: 38 mm
H: 38 mm
No.: **90955400000**



E.

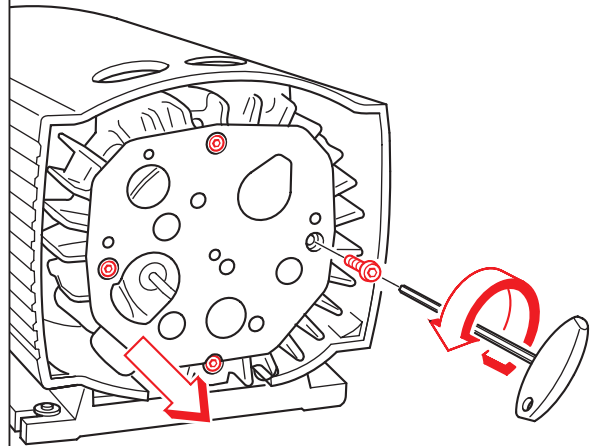

F.



3000 h




$A_{MAX} = 27mm$
 $A_{MIN} = 18mm$

$A_{\text{spray}} < 18mm$





→ No. **90132700007 (SET)**

G.

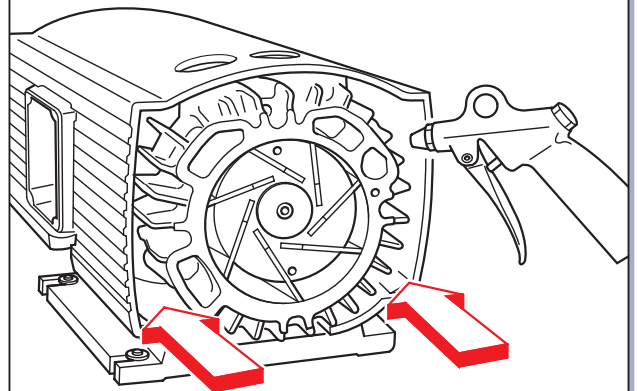

H.

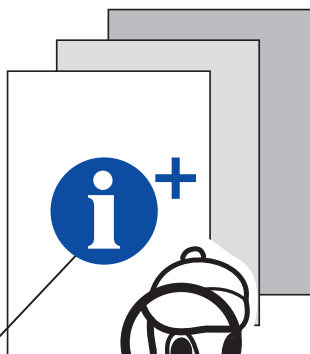

www.becker-international.com



Gebr. Becker GmbH
Hölker Feld 29-31
D-42279 Wuppertal
info@becker-international.com



SERVICE

www.becker-international.com

Sales and service network

www.becker-international.com